
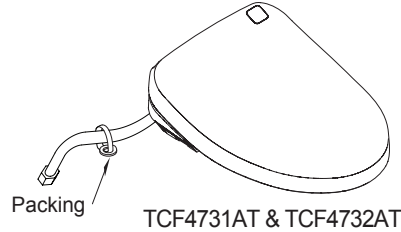


TOTO washlet® Plumbing Installation Manual



- Be sure to read this installation manual before installing the product and install the product properly according to the instructions in this manual
- Installation to be in accordance with AS/NZS 3500 series of Standards and/or local regulations

Checking the parts

1 Washlet main unit

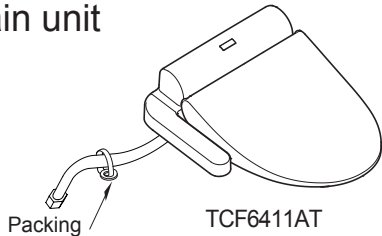

2 Supplied by contractor

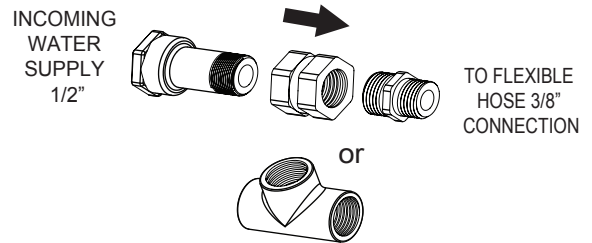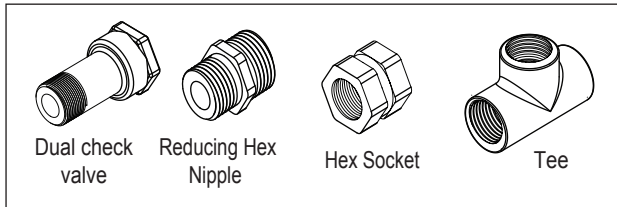


Tee & Hex Socket can be switched if additional water supply required

How to mount

1 Connecting the plumbing unit

The connecting method described below is only an example. Connect the plumbing unit in accordance with the local piping.

1 Mount the plumbing unit to the water shutoff valve.

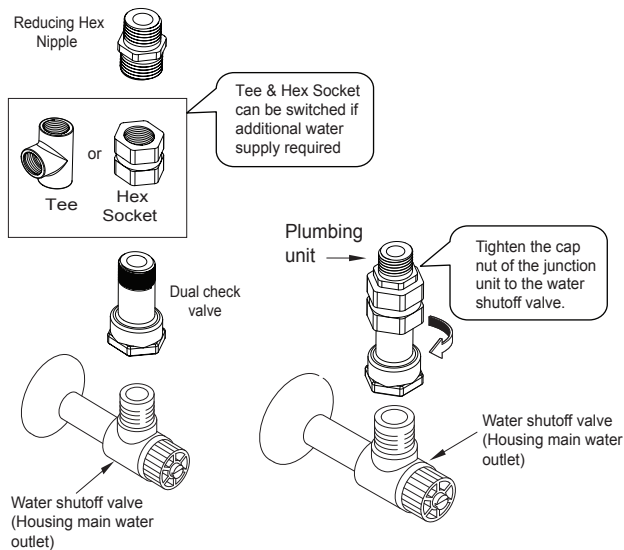


Tee & Hex Socket can be switched if additional water supply required


Tighten the cap nut of the junction unit to the water shutoff valve.

Caution

All threaded joining part need to cover with sealing tape to avoid water leaking

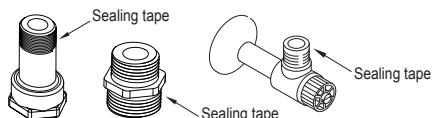

2 Connect the flexible hose.

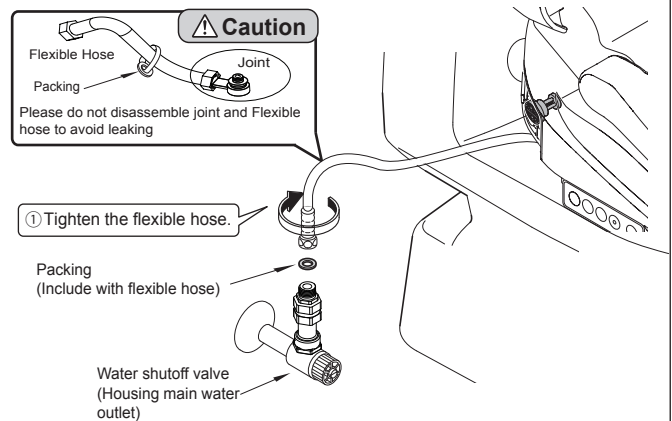

Caution
Please do not disassemble joint and Flexible hose to avoid leaking

1 Tighten the flexible hose.

Packing (Include with flexible hose)

Caution

Fix the flexible hose firmly and tighten the cap nut using crescent wrenches, etc. as shown in the figure so that the threaded part of the junction unit should not turn.

• Insufficient tightening of the cap nut may cause water leakage.

